




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B41F 35/00, A47L 5/38 B08B 7/00	A1	(11) International Publication Number: WO 91/12137 (43) International Publication Date: 22 August 1991 (22.08.91)
(21) International Application Number: PCT/US90/03190 (22) International Filing Date: 6 June 1990 (06.06.90) (30) Priority data: 477,392 13 February 1990 (13.02.90) US (71) Applicant: BALDWIN TECHNOLOGY CORPORATION [US/US]; 401 Shippan Avenue, P.O. Box 9314, Stamford, CT 06904 (US). (72) Inventor: GASPARRINI, C., Robert ; 55 Quintard Drive, Portchester, NY 10753 (US). (74) Agent: VENTURINO, Anthony, P.; Morgan & Finnegan, 345 Park Avenue, New York, NY 10154 (US).	(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent)*, DK, DK (European patent), ES (European patent), FI, FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), NO, SE (European patent). Published <i>With international search report.</i>	

(54) Title: CARBON DIOXIDE CLEANING OF GRAPHIC ARTS EQUIPMENT**(57) Abstract**

The present invention provides a method and apparatus for cleaning printing press components with carbon dioxide snow or pellets. Upon impact, the snow or pellets dislodge debris adhering to the components and sublime to a non-hazardous gas. A typical component cleaned by the present invention would be a rotating blanket cylinder (60) of an offset printing press. The snow or pellets are typically conveyed by an air stream under pressure to a moving nozzle (254), a series of fixed nozzles (54), or some other dispensing device.

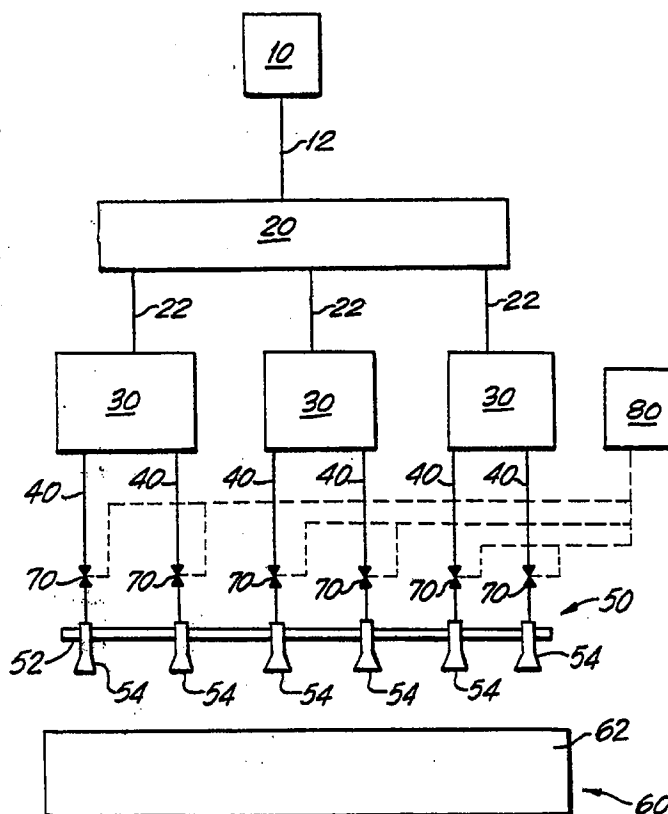

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

CARBON DIOXIDE CLEANING OF GRAPHIC ARTS EQUIPMENT

5

Background of the InventionI. Field of the Invention

10 The present invention relates to a method
and device for cleaning equipment in the graphic arts
industry by airblasting with solid particles of
carbon dioxide. More particularly, the present
invention relates to cleaning printing press
15 components by airblasting with particles of carbon
dioxide.

20 II. Discussion of References

Devices employed in the printing industry
become contaminated with debris such as ink and
lint. This problem occurs whether the printing is on
25 paper or fabrics. The debris also forms, to varying
degrees, on all kinds of printing equipment. For
example, offset printing has become the predominant
printing method in the newspaper publishing
30 industry. Offset printing presses typically employ a

SUBSTITUTE SHEET

- 2 -

° blanket cylinder. A blanket cylinder is a rubber
cylinder or a rubber-covered cylinder, for the
purposes of receiving inked images from a printing
plate. The inked images are then offset onto paper
5 paths between the blanket cylinders or an impression
cylinder. Continuous printing is made possible by
wrapping a printing plate or a plurality of printing
10 plates around the surface of a plate cylinder
designed for rotation in contact with the blanket
cylinder. In operating blanket-to-blanket presses, a
web of paper passes between two blanket cylinders
15 mounted such that one blanket cylinder serves as an
impression cylinder for the other. This results in
"perfecting" which is simultaneous printing on both
sides of the web of paper.

20 Continuous offset printing is adversely
affected by dust and lint from the web of paper which
tend to accumulate on the blanket cylinder(s). This
dust and lint reduces the quality of the printed
25 product. The accumulation of dust, lint, or ink on a
blanket cylinder thus presents a serious annoyance
and necessitates undesirable down-time for cleaning.
30 The problem is especially acute in the newspaper
industry, when, in response to the rising cost of

SUBSTITUTE SHEET

- 3 -

newsprint stock, less expensive grades of paper having higher lint content often are substituted for more expensive grades.

5 The problem of collection of debris such as ink, dust and lint on printing devices is not limited to offset printing. It occurs in press equipment in general. For example, it occurs on Anilox Rollers, Flexo Plate Cylinders and Plates, pipe rollers in 10 newspaper presses, metal decorating press blanket cylinders, rollers, and impression cylinders, Gravure press cylinders and rollers, Flexo press cylinders or 15 rollers, and textile printing plates, blankets and rollers. The problem of cleaning printing equipment is well known as indicated by prior efforts for printing equipment cleaner devices.

20 In some types of printing, sheets are cut and stacked prior to printing. The sheets are prevented from sticking by application of a dusty material such as corn starch. Use of corn starch 25 laden sheets provides another source of debris.

U.S. Patent No. 4,344,361 to MacPhee et al. discloses an automatic blanket cylinder cleaner 30 having a cleaner fabric adapter to contact a blanket cylinder. A cleaning roll supply roller provides

SUBSTITUTE SHEET

° cloth for cloth take-up roll. Positioned between
these rolls is a water solvent dispensing tube, a
solvent dispensing tube and an inflatable and
deflatable mechanical loosening means which is
5 adapted to move the cleaning fabric into and out of
the contact with the blanket cylinder. This patent
is incorporated by reference.

10 Devices employing carbon dioxide for
sandblasting are disclosed by U.S. Patent Nos.
4,038,786 to Fong and 4,389,820 to Fong et al. Both
of these patents are incorporated herein by reference.

15 However, these patents do not disclose
employing particles of carbon dioxide or other
sublimable particles for use in cleaning printing
devices.

20

Summary of the Invention

It is an object of the present invention to
provide a method for using carbon dioxide particles
25 to clean debris comprising ink, lint and/or dust from
components of printing devices.

It is another object of the present
invention to provide an apparatus for cleaning
30 cylindrical components of printing devices with
carbon dioxide.

It has been found that components of printing devices, such as a rotating blanket cylinder of an offset printing press, can be cleaned by transporting carbon dioxide particles by use of an air stream under pressure to a nozzle or other dispensing device. The carbon dioxide particles may be in snow or pelletized form. While the pelletized form is preferably shaped as a cylinder, other pelletized forms include spherical forms, tetrahedral forms or other solid chunks of carbon dioxide. The dispensed solid carbon dioxide particles mix with the air stream and discharge from the nozzle to dislodge a build-up of debris from printing device components such as a blanket cylinder. This restores the surface of the component to printable condition.

In the case of a rotating blanket cylinder, this technology provides for cleaning to bare rubber or can be made to allow removing a portion of the debris. This is accomplished by varying the amount, density, and type of particle dispensed along with the length of cycle time and air velocity.

The system includes a storage tank of liquid carbon dioxide and means for converting the liquid carbon dioxide to particles in the form of snow or

° further converting the liquid carbon dioxide to particles in the form of pellets. The particles are then transported by pressurized air to impinge on the surface to affect cleaning. Upon impact, the pellets
5 dislodge debris and sublime to a non-hazardous gas. Pellets have the best cleaning ability due to size and density.

10 When a snow system is employed, a pelletizer is unnecessary. In this case, liquid carbon dioxide is converted to snow and transported by pressurized air as in the case of pellets. However, the snow
15 system is simpler than the pellet system because it involves less hardware. In addition to the cleaning method described above, air, vacuum, or mechanical means can be utilized in combination, or alone to
20 remove debris from the cleaned area if desired.

The present invention also pertains to an apparatus for forming the above-described method with debris laden cylindrical components of printing
25 devices. The apparatus includes nozzles either fixedly or movably attached to a bar which is located parallel to the cylindrical component and sufficiently near the cylindrical component such that
30 the carbon dioxide particles discharged from the nozzle will clean the component.

° Brief Description of the Drawings

Figure 1 is a schematic of a first embodiment of an apparatus of the present invention for cleaning a cylindrical component;

5 Figure 2 shows an embodiment of the present invention employing movable nozzles;

Figure 3 is a schematic diagram of the present invention employed with an offset printer;

10 Figure 4 is a schematic figure of a third embodiment of the present invention employed with a perfecting type offset printer;

15 Figure 5 is a schematic of the present invention employed with an Anilox printer;

Figure 6 is a schematic of the present invention employed with a letter press;

20 Figure 7 is an enlarged side view of the downstream end of a nozzle of Figure 1;

Figure 8 is a front view of Figure 7 along Section DD; and

25 Figure 9 is an optional nozzle housing.

Description of the Preferred Embodiments

30 Figure 1 shows a first embodiment of the present invention when employed to clean a roll 60

- 8 -

° having a rubber blanket 62. Such a roll 60 is typically employed with offset printing.

The first embodiment includes a carbon dioxide liquid tank 10. A typical carbon dioxide tank 10 has one-ton capacity. The liquid carbon dioxide passes through a conduit 12 to a carbon dioxide solidifier 20. Conduit 12 is preferably no more than 175 feet long. The solidifier 20 includes a snow chamber and, optionally, means for pelletizing the snow. Examples of snow chambers and means for forming pellets from the snow are disclosed by U.S. Patent Nos. 4,038,786 and 4,389,820; both of which are incorporated herein by reference in their entirety. A typical system pelletizer produces 300 lbs/hr. of pellets. Snow may also be created by an expansion valve and conveyed directly to the nozzles.

The snow or pellets pass through conduits 22 to hoppers 30. Preferably, conduits 22 are each no more than 175 feet long. Hoppers 30 are insulated and preferably provided with a Penberthy-type eductor (not shown) which is air driven. Each hopper is connected to one or two (two shown) nozzles 54 by a conduit 40. Preferably the hoppers are filled prior to when the nozzles discharge.

- 9 -

The nozzles 54 may be a simple conveying type, a venturi nozzle, or a venturi nozzle designed for a supersonic discharge. Preferably the hose/pipe length of the conduit 22 from the pelletizer to the hopper is at most 175 feet. Preferably the hose/pipe length from the conduit from the tank to the snowmaker/pelletizer is at most 175 feet. Nozzle lengths typically range from about 1 to about 4 inches. Preferably each conduit 40 is no more than 20 feet long. The nozzles 54 are part of a press mounted header 50. The press mounted header 50 also includes a bar 52 upon which the nozzles 54 are fixedly mounted. Preferably the header 50 is mounted at any convenient location on the press which locates the nozzles sufficiently close to the blanket 62 to provide cleaning. Typical blankets move 1800 to 2000 feet per minute of paper so it would be advantageous to provide controls to automatically or manually clean the blanket 62 without a person getting dangerously close to the blanket 62 as it rotates. Accordingly, conduits 40 can be provided with valves 70 to control flow rate there through. These valves can either be manually or automatically controlled by an appropriate conventional controller 80.

SUBSTITUTE SHEET

- 10 -

° A typical hopper 30 would hold the amount of pellets which can be conveyed in 30 seconds to 90 seconds. The pellets or snow are conveyed through conduits 22 by conventional pneumatic conveying. The
5 CO₂ particles (either snow or pellets) are conveyed from the hoppers 30 to the nozzles 54 through the conduits 40 by pneumatic conveying. One example of such pneumatic conveying is disclosed by U.S. Patent
10 No. 4,038,786. Typically, compressed air is injected either into the conduit 40 or into the nozzle 54 to accelerate the particles prior to discharge from the nozzle 54. The compressed air typically has a
15 pressure of about 40 to about 200 pounds per square inch gage pressure.

 A typical flow rate is 2.4 pounds of pellets
20 per a one inch nozzle. The pellets or snow flow rate ranges from about 0.5 pounds per minute to about 4 pounds per minute per nozzle, preferably no more than 2.5 pounds per minute per nozzle. Air flow rate
25 ranges from 40 to 60 SCFM for a one inch nozzle. Typically the distance from the hopper to a nozzle is at most 20 feet. Compressed air at a pressure of 40 to 200 psig may be employed to convey particles out
30 of the hopper. Typical pressure ranges from about 30

ENCLOSURE SHEET

- 11 -

to about 60 psig. Preferably the pressure ranges from about 40 to about 50 psig. A typical hose/pipe/fitting bend radius ranges from 3 to 4 inches. A typical hose diameter ranges from about 3/8 to 3/4 inches. Nozzle diameter may range from one inch to as little as about 1/4 inch.

The rotating blanket cylinder 62 of an offset printing press can be cleaned by transporting the solid carbon dioxide material by use of an air stream under pressure (either in snow or pelletized form) to the header 50 of fixed nozzles 54 as shown by Figure 1. Figure 2 shows a second embodiment of the invention in which the header 50 is replaced by a transport mechanism 250 comprising a bar 252 and movable nozzles 254. Means (not shown) are provided to move the nozzles back and forth along the bar 252 to clean the entirety of the blanket 62. The transport mechanism 250 would be press mounted.

The rotating blanket cylinder 60 of an offset printing press such as shown by Figure 3, is cleaned by transporting carbon dioxide solid material by use of an air stream under pressure (either in snow or pelletized form) to the moving nozzle 254 or the series of fixed nozzles 54 or other dispensing

- 12 -

° devices. The dispensed solid, mixed with the air stream, dislodges the debris which includes build-up and piling from the blanket cylinder 60 thereby restoring its surface to printable condition. This
5 technology can provide for cleaning to bare rubber, or can be made to allow removing a portion of the debris. This can be accomplished by the amount and density of the type solid dispensed along with the
10 cycle on-time and air velocity.

The solid particles of carbon dioxide, in either snow or pellet form, are transported by
15 pressurized air to impinge on a surface to affect cleaning. Upon impact, the pellets dislodge the debris and sublime to a non-hazardous gas. Pellets have the best cleaning ability due to size and
20 density, however, a snow system is simpler.

In a case such as the embodiment of Figure 2 in which two movable nozzles 254 are employed on a single bar 252, two hoppers may be provided per bar
25 to provide one hopper for each nozzle. In another embodiment, one hopper per bar would be employed for two nozzles. In any of the above embodiments, one
30 hopper could be oversized to serve several bars sequenced through valving. The hoppers from the

- 13 -

carbon dioxide solidifier 20 should be filled during off time of the cleaning system. The fixed nozzles may be employed in fixed slots and tubes. One carbon dioxide solidifier (with or without pelletizer) would typically be employed per press, although more could be employed as necessary. The snow or pellets would be distributed along a cylinder length varying from 8 inches to 70 inches. The invention may also be employed as a distribution device for cleaning flat surfaces of varying width in one pass.

Figure 3 shows the rolls of a typical offset printer employing the present invention. Like items bear the same numbers throughout the figures. The offset printer comprises a plate cylinder 100 in contact with the blanket cylinder 60 and an impression cylinder 110. A continuous web of paper 115 would pass between the blanket cylinder 60 and impression cylinder 110. The header 50 would be located sufficiently close to the blanket cylinder 60 such that the carbon dioxide particles would impinge on the blanket cylinder 60 thereby cleaning debris from the blanket cylinder 60. The debris includes ink, as well as lint and dust. Instead of a web 115 of paper, fabric or sheets of paper could pass

SUBSTITUTE SHEET

- 14 -

° between the blanket cylinder 60 and impression cylinder 110.

Printing on both sides of a web 115 is known as perfecting. Perfecting is accomplished by having
5 an offset printing press as shown in Figure 4. The offset printing press substitutes the impression cylinder 110 of Figure 3 with a blanket cylinder 130 in contact with a plate cylinder 140. A second
10 carbon dioxide header 120, which is substantially the same as carbon dioxide header 50, is located sufficiently close to blanket cylinder 130 to clean
15 the blanket cylinder of debris when appropriate.

Figure 5 discloses an Anilox printer that is cleaned by the method and apparatus of the present invention. The printer comprises a plate cylinder
20 150 and an Anilox cylinder 160. The Anilox cylinder 160 is partially immersed in a body of ink 172 located within an ink tank 170. A squeegee 174 is provided to remove excess ink from the Anilox
25 cylinder 160. A web of paper 155 passes between the plate cylinder 150 and impression cylinder 161 as the cylinders rotate. The header 50 is located
30 sufficiently close to the Anilox cylinder 160 so that it may clean the Anilox cylinder 160 with the carbon

- 15 -

dioxide particles in snow or pellet form. The Anilox printer shown by Figure 5 is similar to a Gravure printer so a separate Gravure printer figure is not shown. Header 50 can also be positioned to clean the plate cylinder 150 or impression cylinder 161.

Figure 6 shows a letter press which employs the cleaning method and apparatus of the present invention. This letter press includes a plate cylinder 200 and an impression cylinder 220. A web of paper 210 passes between the cylinders 200, 220 as they rotate. The header 50 of the present invention would be located sufficiently close to the impression cylinder 220 to clean the impression cylinder as appropriate. The letter press shown by Figure 6 is similar to a Flexo press so a separate Gravure printer figure is not shown. Header 50 can also be positioned to clean plate cylinder 200.

Either the header 50 employing fixed nozzles 54 or the press mounted translation device 250 with movable nozzles 254 may be employed with any of the presses of Figures 3-6. Typical designs for nozzles 54, 254 are disclosed by U.S. Patent Nos. 4,038,786 and 4,389,820.

- 16 -

° Either the pellet or snow technique can be employed in the printing industry to clean a wide variety of press and printing equipment in general. Examples of such equipment include the following:

5 blanket cylinders, impression cylinders, Anilox rollers, Flexo plate cylinders and plates, pipe rollers in newspaper presses, metal decorating press blanket cylinders, rollers, and impression cylinders,

10 Gravure press cylinders or rollers, Flexo press cylinders or rollers, and textile printing plates, blankets or rollers, or gripper bar cleaners.

15 Possibilities for cleaning in the graphic arts field are vast and encompass the following areas: lithography (offset), Flexography, Gravure, Intaglio, and letter press. This technology provides

20 substantially hazard-free cleaning.

 In the embodiment shown by Figures 7 and 8, the nozzle 54 has an upstream cylindrical portion 56 and a downstream tapered neck 57. The neck 57 is

25 tapered in the direction shown on Figure 7. However, neck 57 is flared in the direction shown in Figure 1. The downstream tapered portion 57 ends as an

30 elliptical nozzle end 58. In a typical instance, the upstream portion 56 has an inside diameter A of 1/2

- 17 -

inch and the end 58 is necked down and flared out to have an elliptical shape with a dimension C of about 1 inch and an dimension B sufficient to provide an area equivalent to that of about a 3/8 inch inside diameter circle.

In addition to the cleaning technology described, any or all of air, vacuum or mechanical means may be utilized to remove debris from the cleaned area either before or after cleaning with carbon dioxide. This is accomplished by at least locating nozzle 54 (or 254) or at least its downstream end 57 in a housing 300 shown on Figure 9. The housing 300 is provided with flexible strips 310 that contact or are adjacent to a cylinder (such as cylinder 60) to form a seal. To clean with vacuum, a vacuum hose, not shown, would be attached to the housing 300 to evacuate it. To clean with air, an air inlet hose (not shown) would be attached to one end of the housing 300 and an air outlet hose (not shown) would be attached to another end of the housing 300. In the case of mechanical cleaning, a rod like piece (not shown) would move from one end of the housing 300 to the other end of the housing 300 to push out the removed debris. In some cases,

SUBSTITUTE SHEET

- 18 -

° especially for cleaning of newspaper related
equipment, the debris inconspicuously blends into the
newspaper web itself so the housing 300 is
unnecessary for some applications.

5 The present invention is further exemplified
by the following non-limiting examples.

Example 1

10 A sheet fed blanket was cleaned of piling by
low-pressure pellets. However, ink stain remained on
the blanket after treatment with low-pressure
pellets. The pressure was 40 psig with a flow rate
15 of approximately 40 SCFM.

Example 2

A newspaper blanket cleaned completely and
quite easily with low-pressure pellets and snow. A
20 nozzle was moved at approximately 6 inches per second
at a pellet rate of 2.4 pounds per minute flow.
Pressure was 40 psig with a flow rate of
approximately 40 SCFM.

25 Even in Example 1 where the dried ink
remained, it is expected that the dried ink could be
removed by employing a higher air and pellet flow
rate.

30

- 19 -

It appears that pellet rate could be reduced considerably from the 2.4 pound per minute rate and still clean the blanket of Example 2. The nozzle cleaned the newspaper blanket in one pass. It is expected that a commercial operation would employ one to four washes per hour. Although a one inch nozzle may employ 40 to 60 SCFM, a 3/8 inch nozzle could employ about 8 to about 12 SCFM at 40 psig. A typical blanket cylinder which handles 2000 feet per minute of paper web moves approximately 6 revolutions per second. If a nozzle travels at 6 inches per second, while the cylinder rotates at 6 revolutions per second, then one inch of travel would completely clean the blanket cylinder over the corresponding one inch portion of the blanket.

While specific embodiments of the method and apparatus aspects of the invention have been shown and described, it should be apparent that many modifications can be made thereto without departing from the spirit and scope of the invention. Accordingly, the invention is not limited by the foregoing description, but is only limited by the scope of the claims appended hereto.

SUBSTITUTE SHEET

- 20 -

CLAIMS

I claim:

- 5 1) A method for cleaning debris comprising ink
 and paper lint from a portion of a printing
 device comprising:
 freezing carbon dioxide to form
 particles comprising carbon dioxide;
10 conveying said particles with a
 transport gas through a nozzle;
 discharging said particles from said
15 nozzle to contact said portion of said
 printing device and remove said debris,
 wherein at most 10% of said formed
 particles sublime prior to said
20 discharge.
- 2) The method of Claim 1, wherein said printing
 device is an offset printing press.
- 25 3) The method of Claim 2, wherein said portion
 of said printing press is a blanket cylinder.
- 30 4) The method of Claim 1, wherein said
 particles discharge from said nozzle at
 supersonic speed.

SUBSTITUTE SHEET

- 21 -

- 5) The method of Claim 4, wherein said portion
is selected from a blanket cylinder, an
impression cylinder, an Anilox roller, a
Flexo plate cylinder, a Flexo plate, a
newspaper press pipe roller, a metal
decorating press blanket cylinder, a metal
decorating press roller, a metal decorating
press impression cylinder, a Gravure press
cylinder, a Gravure press roller, a Flexo
press cylinder, a Flexo press roller, a
textile printing plate, a textile printing
blanket, a textile printing roller.
- 6) The method of Claim 5, further comprising
directing said removed debris away from the
vicinity of said portion of said printing
device by an air stream.
- 7) The method of Claim 6, wherein said removed
debris is vacuumed away from said printing
device.
- 8) The method of Claim 5, further comprising
collecting said removed debris in an conduit

SUBSTITUTE SHEET

- 22 -

- ° alongside said portion of said printing device and mechanically pushing the collected debris out of said conduit.
- 5 9) The method of Claim 5, wherein said particles are in the form of snow.
- 10 10) The method of Claim 5, wherein said particles are in the form of pellets.
- 15 11) The method of Claim 5, wherein said particles pass through a plurality of fixed nozzles.
- 20 12) The method of Claim 5, further comprising moving said nozzle along a bar which is parallel to said portion of said printing device as said particles discharge from said nozzle.
- 25 13) The method of Claim 12, wherein said particles discharge through two nozzles attached to said bar and said two nozzles move along said bar during said discharging
- 30

step and each nozzle travels at about 2-12 inches per second.

- 14) The method of Claim 5, wherein said particles are conveyed into a hopper, from said hopper through a hose, and then to said nozzle by air at 30-60 psig; 40-60 SCFM of air discharge and about 0.5 to about 3.5 pounds per minute of particles discharge per nozzle; and said nozzle has at least one inside dimension perpendicular to particle flow at its outlet of about 0.375 to about 1.5 inches.
- 15) An apparatus for cleaning debris comprising ink and paper lint from a cylindrical component of a printing device comprising: means for generating solid carbon dioxide particles; a nozzle having an upstream end and a downstream end, said downstream end located to discharge said particles to contact said cylindrical component;

- 24 -

means for conveying said particles from
said means for generating to said
nozzle;
a translation device attached to said
printing device, said translation
device comprising a bar, said bar being
parallel to said cylindrical component,
said nozzle being functionally attached
to said bar such that said translation
device comprises means for moving said
nozzle along said bar during said
discharge.

- 16) The apparatus of Claim 15, wherein said
nozzle downstream end is located within a
housing.
- 17) The apparatus of Claim 16, wherein said
housing comprises means for removing debris
from said housing after said debris has been
cleaned from said cylindrical component.
- 18) An apparatus for cleaning debris comprising
ink and paper lint from a cylindrical

- 25 -

- °
component of a printing device comprising:
means for generating solid carbon
dioxide particles;
5 a nozzle having an upstream end and a
downstream end, said downstream end
located to discharge said particles to
contact said cylindrical component;
10 means for conveying said particles from
said means for generating to said
nozzle;
a bar functionally attached to said
15 printing device, said nozzle fixedly
attached to said bar and directed
toward said cylindrical component.
- 20 19) The apparatus of Claim 18, wherein said
nozzle downstream end is located within a
housing.
- 25 20) The apparatus of Claim 19, wherein said
housing comprises means for removing debris
from said housing after said debris has been
30 cleaned from said cylindrical component.

SUBSTITUTE SHEET

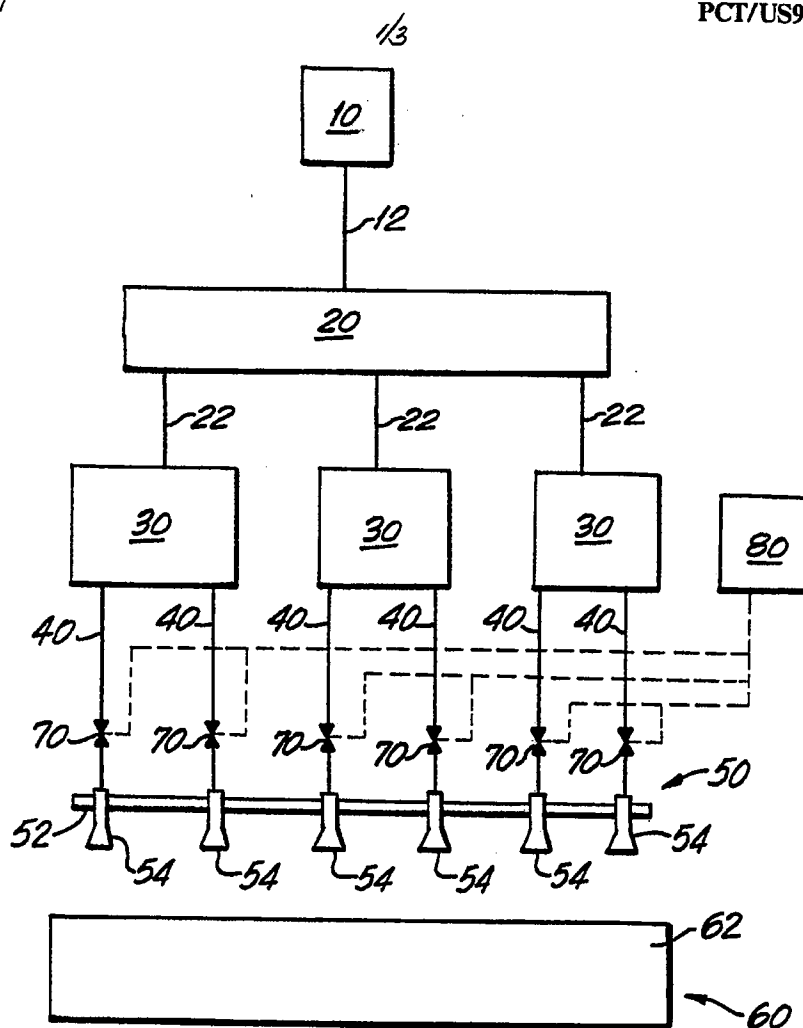


FIG. 1

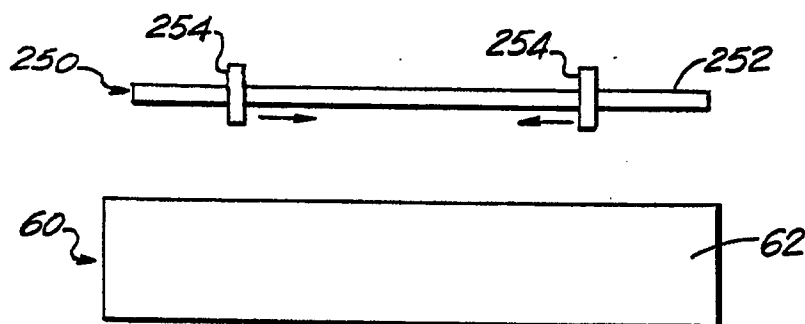


FIG. 2

SUBSTITUTE SHEET

2/3

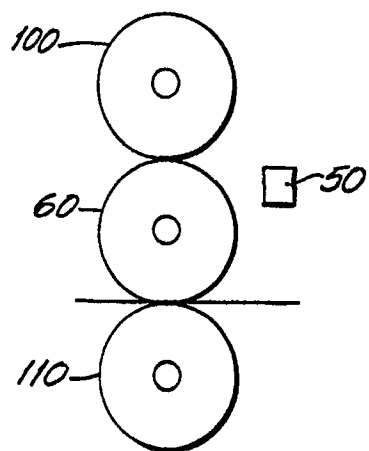


FIG. 3

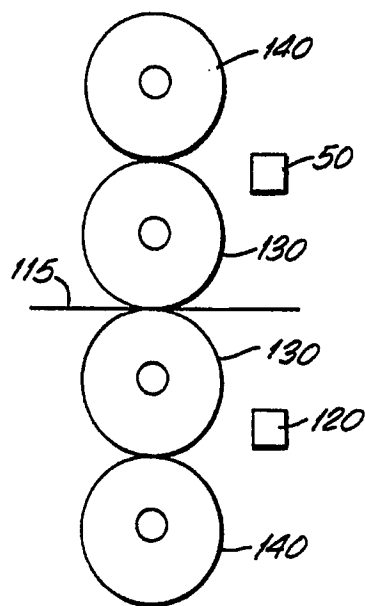


FIG. 4

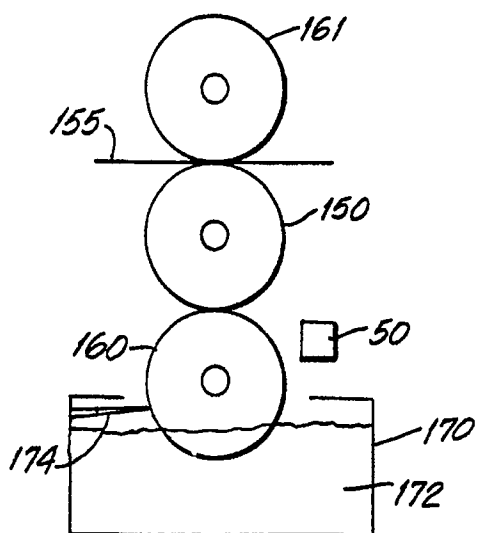


FIG. 5

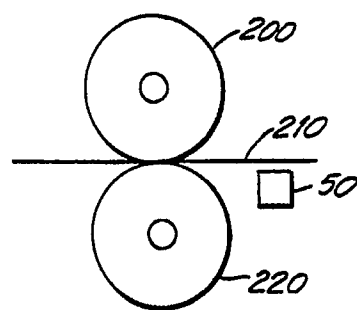


FIG. 6

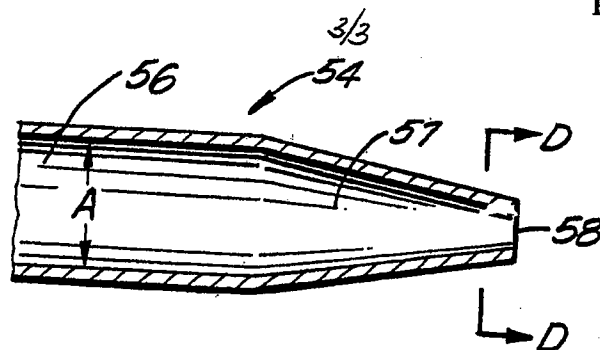


FIG. 7

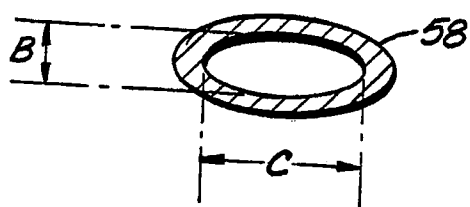


FIG. 8

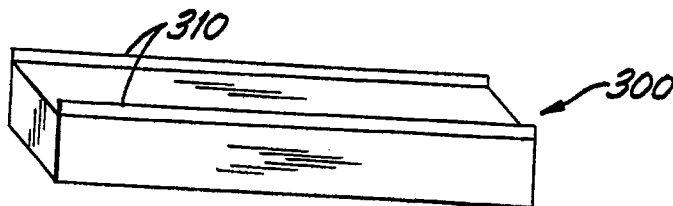


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No PCT/US90/03190

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ¹		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC(5): B41F 35/00 A47L 5/38 B08B 7/00		
U.S. CL.: 101/423, 425, 15/318 134/7		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
U.S.	101/423, 425 15/318 134/7	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim: No. ¹⁸
Y	JAPAN A 000498 (HIRABE) 09 JANUARY 1988 See the entire document.	1-20
Y	US, A 4038786 (FONG) 02 AUGUST 1977 See the entire document.	1-20
Y	US, A 3843409 (ICE, JR) 22 OCTOBER 1974 See the entire document.	12,13,15-17
A	US, A 4744181 (MOORE ET AL) 17 MAY 1988 See the entire document.	1-20
A	US, A 4617064 (MOORE) 14 OCTOBER 1986 See the entire document.	1-20
<p>¹⁵ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ²	Date of Mailing of this International Search Report ³	
02 AUGUST 1990	22 FEB 1991	
International Searching Authority ¹	Signature of Authorized Officer ²⁰	
ISA/US	REN YAN	